

SELECT



SINGLE-PHASE charger

GENERAL SPECIFICATIONS:

Connector:	Type 2 (IEC 62196 MENNEKES)
Dimensions:	298 x 248 x 170 mm
Colour:	White
Weight:	9 kg
Protection rating:	IP54 / IK08
Material type:	Steel body, plastic cover
Locking system:	Weatherproof enclosure with keyed security lock
Reference standards:	2014/35/EU, IEC61851-1, IEC1851-22, IEC62196-1
Cable length:	5 or 10 metres
Screen:	TFT 2.9" colour display

USER INTERFACE AND COMMUNICATIONS:


Connectivity:	Bluetooth 4.1 // Cloud (Optional)
Device configuration:	WOLTIO mobile app
Charging enablement:	Via mobile app, Smart Enable key accessory, and RFID card
External control:	Volt-free input and open-collector output (max. 100 mA)

ELECTRICAL SPECIFICATIONS:

Maximum charging power:	7,4 kW
Charging current:	Configurable from 6A to 32A
AC voltage range:	230V $\pm$ 10% 1P+N+PE
Frequency:	50 Hz
Charging mode:	Mode 3
Operating temperature:	-25°C a +50°C
Stand-by consumption:	< 3 W

**Includes load balancing clamp*

DIMENSIONAL DRAWINGS:

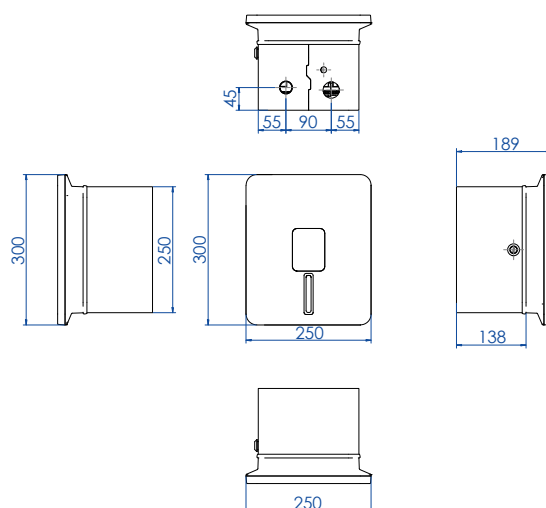



SELECT



Perfect for home charging, easy to use, and highly efficient, the **WOLTIO SELECT** is part of the WOLTIO residential charging range. Enjoy a smart and sustainable charging experience, designed to make the transition to electric mobility simple while unlocking all the benefits of the future of transportation.



Easy
installation



Photovoltaic
integration



Optional Cloud
connectivity



Load
balancing



Highly
durable



Bluetooth
Connectivity

Designed and manufactured in Spain